DuraPak

"The Quiet Solution" 500 SERIES

DuraPak[™]500 Series Compactors deliver exceptional quality and power while running more quietly than similar models. Designed for high-rise applications, DuraPak[™] machines are ideal choices for hotels, hospitals, apartment and office buildings. For use with compaction cans.

STANDARD FEATURES


- ★ "UL" Labeled Control Panel
- ★ Photo Electric Eye With Time Delay
- ★ 2 Interlocked Side Access Doors with Automatic Shut-Off
- ★ Night Shut Down
- ★ Programmable Logic Control (PLC)
- **★** ANSI Compliant
- ★ Ratchet Turnbuckle Hook-Up
- ★ Wear Pads
- ★ Container Full Light
- ★ Oil Pressure Gauge
- ★ Excessive Run Timer
- ★ Maintenance Reminder Indicator
- ★ 208/240/480V Control Panel
- ★ Adjustable/Interchangeable Left/Right Side Container Hookup

OTHER OPTIONS AVAILABLE





	DP500-HD	DP505-HD
UL Labeled	Yes	Yes
ANSI Compliant	Yes	Yes
Access Doors	2	2
Access Door Side	Changeable	Changeable
Single Sided Ratchet	Changeable	Changeable
Adjustable SS Ratchet Bar	Yes	Yes
WASTEC Rating	0.34	0.34
Tri-Voltage	Yes (3-Phase)	Yes (3-Phase)
Cycle Time	Adjustable 13.7-60 sec	32 sec
Maintenance Reminder	Yes	Yes
Ram Face	30"W x 21"H	30"W x 17"H
Short Frame	Yes	Yes




The DuraPak compactor is subject to our continuous improvement program, and we reserve the right to implement changes and improvements to the products shown herein without prior notice. ©2018 CHUTES International Manufacturing, LLC

Loaded With Extras At Standard Prices! www.chutes.com | 1.800.882.4883



DuraPak

"The Quiet Solution" 500 SERIES

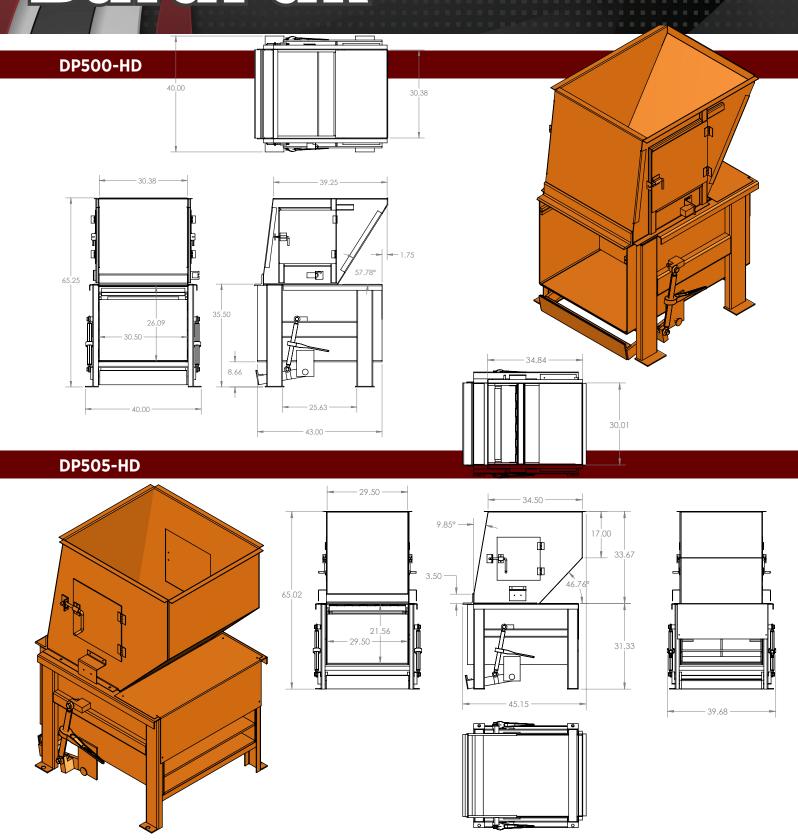

The DuraPak compactor is subject to our continuous improvement program, and we reserve the right to implement changes and improvements to the products shown herein without prior notice. ©2018 CHUTES International Manufacturing, LLC

Loaded With Extras At Standard Prices! www.chutes.com | 1.800.882.4883

DuraPak[™]
500 SERIES

DuraPak

"The Quiet Solution" 500 SERIES

DP500

HYDRAULICS	
No of Cylinders	2
Bore/Rod	2.5"/1.375
Cylinder Stroke	20"
Pump	6.0 GPM
Valve	Single Solenoid Soft Shift
Oil Reservoir	14 GAL
Normal Cycle Time	Adjustable 13.7-60 Sec
Normal Pressure	Adjustable 1350-1650 PSI
Max. Pressure	1950 PSI
Normal Force	13,900 LBS / 23.2 PSI

RAM	
Top Plates	1/4"
Sides	1/4"
Floor	3/8"
Face Plate	3/8"
Steel Wiper	3" x 1/4"
Replaceable Wear Pads	YES
Ram Penetration	4.25"

COMPACTOR FRAME	
WASTEC Rated Size	0.34
Hopper Top Opening	38" x 30"
Capacity Per Hour	77 cu. Yards
Floor (1/4" + 1/4" Wear Plate)	1/2"
Breaker Bar	4" x 3" x 1/2"
Side Plates	1/4"
Hopper Sides & Front	11 GA.
Hopper Impact Plate	1/4"
Ratchet Turnbuckle Cap.	38,000 lbs
Weight w/o Power Unit	1600 lbs
Compaction Chamber	30" x 21" x 26.5"
Machine Dimensions	46"L x 39"W x 65"H

ELECTRICAL	
Motor (TEFC)*	5 HP
"UL" Labeled	YES
Power	208/240/480 3 Phase
NEMA Type Fuse	YES
Photo Electric Eye	YES

DP505

HYDRAULICS	
No of Cylinders	2
Bore/Rod	2.5"/1.25
Cylinder Stroke	20"
Pump	3.1 GPM
Valve	Single Solenoid Soft Shift
Oil Reservoir	14 GAL
Normal Cycle Time	32 Sec
Normal Pressure	1700 PSI
Max. Pressure	2000 PSI
Normal Force	14,025 LBS

RAM	
Top Plates	1/4"
Sides	1/4"
Floor	3/8"
Face Plate	3/8"
Steel Wiper	3"
Replaceable Wear Pads	NO
Ram Penetration	4"

COMPACTOR FRAME	
WASTEC Rated Size	0.33
Hopper Top Opening	35" x 30"
Capacity Per Hour	112 cu. / hr
Floor (1/4" + 1/4" Wear Plate)	1/2"
Breaker Bar	4" x 3" x 1/2"
Side Plates	1/4"
Hopper Sides & Front	11 GA.
Hopper Impact Plate	1/4"
Ratchet Turnbuckle Cap.	38,000 lbs
Weight w/o Power Unit	1600 lbs
Compaction Chamber	29.5" x 21.5" x 26"
Machine Dimensions	45"L x 39.5"W x 65"H

ELECTRICAL	
Motor (TEFC)*	5 HP
"UL" Labeled	YES
Power	208/230/460 3 Phase
NEMA Type Fuse	YES
Photo Electric Eye	YES