



4

3

2

1

CHUTE DIAMETER	MINIMUM CENTER DISTANCE (CTR)	MAXIMUM CENTER DISTANCE(CTR)	STANDARD CENTER DISTANCE(CTR)
20"	14"	43"	20"
24"	16"	39"	22"
28"	18"	35"	24"
30"	19"	33"	25"
36"	22"	27"	27"

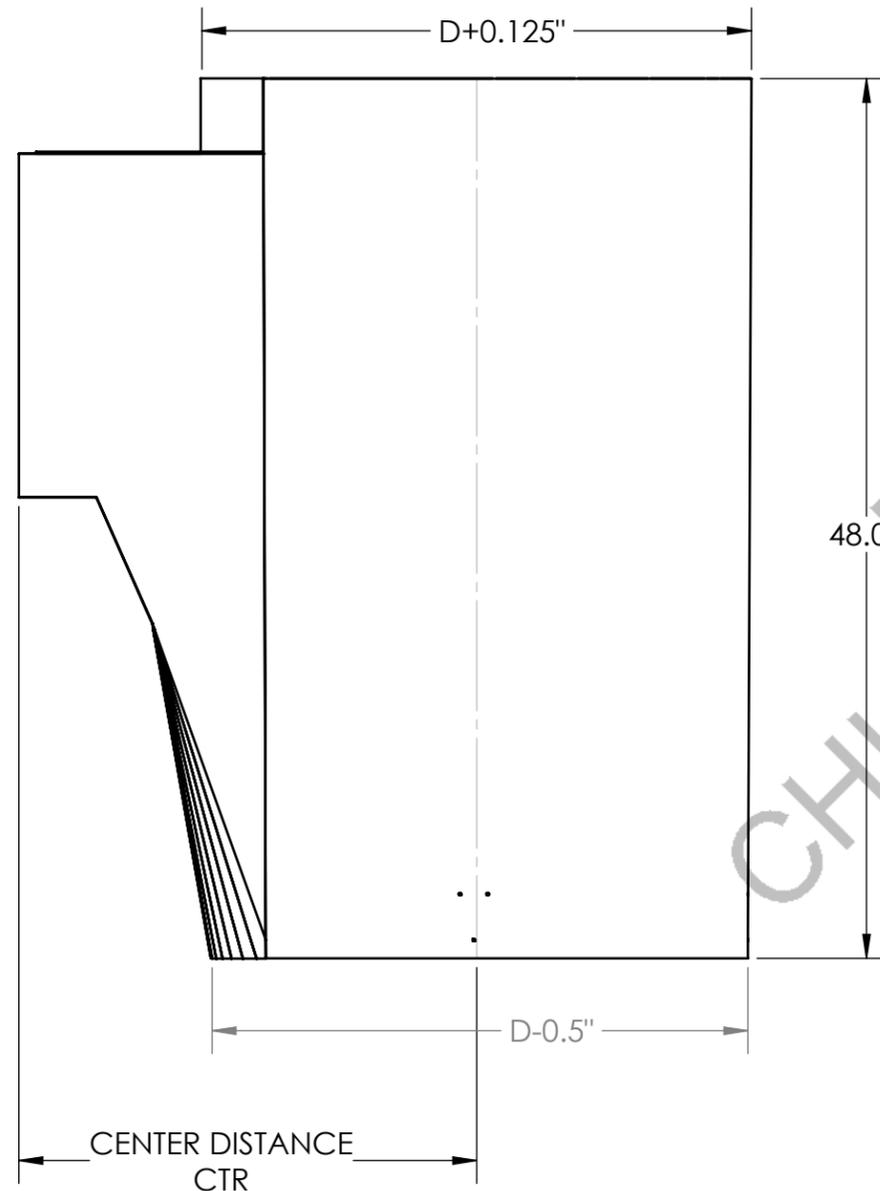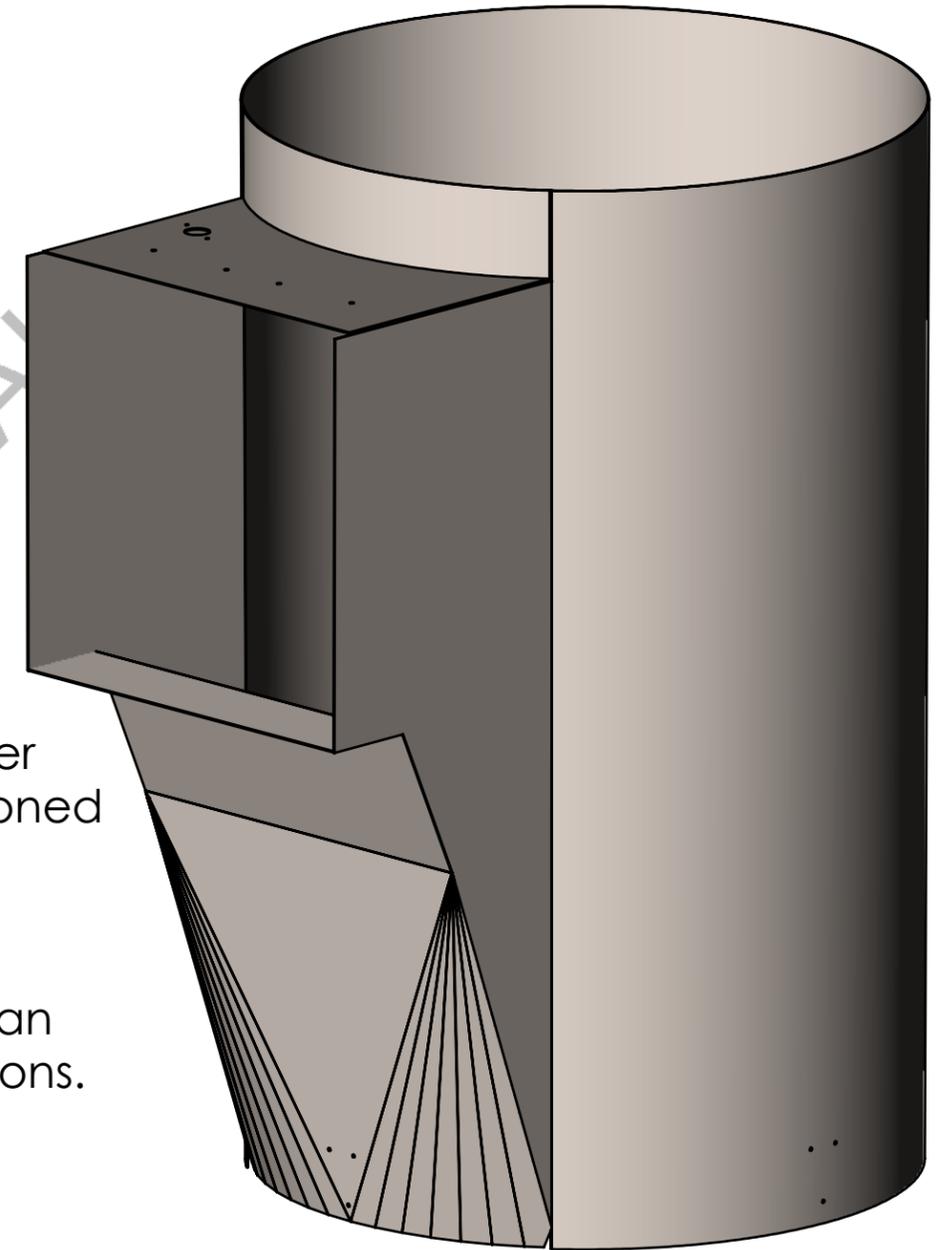

Note:

* Center distance can not be smaller than the minimum dimension mentioned above unless we reduce the chute diameter.

* Center distance greater than the above mentioned maximum limit can be achieved by using throat extensions.

UNLESS OTHERWISE SPECIFIED:	NAME	DATE	CHUTES <small>PATENTED CHUTES INTERNATIONAL™</small> 33 Industrial Park Dr. Waldorf, MD 20602 Phone: (240) 448-5000 Fax: (301) 753-4108 WWW.CHUTES.COM
DIMENSIONS ARE IN INCHES	DRAWN	KASSIE 07/13/22	
TOLERANCES:	CHECKED		
FRACTIONAL $\pm 1/16$ ANGULAR: MACH $\pm 1^\circ$ BEND $\pm 1^\circ$ BEND-LINE PLACEMENT ± 0.010 THREE PLACE DECIMAL ± 0.100 WELD THICKNESS $+ 1/16$	MFG APPR.		
SHEET METAL SPECIFICATIONS	PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF CHUTES INTERNATIONAL MANUFACTURING. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF CHUTES INTERNATIONAL MANUFACTURING IS PROHIBITED.		DESCRIPTION: Min. & Max. throat-center size for different chute sizes
COMMENTS:	SIZE	PART ID:	REV
	B		
	DO NOT SCALE DRAWING	SCALE: 1:16	SHEET 1 OF 1

4

3

2

1