



4

3



2

1


THROUGH WALL WITH THROAT

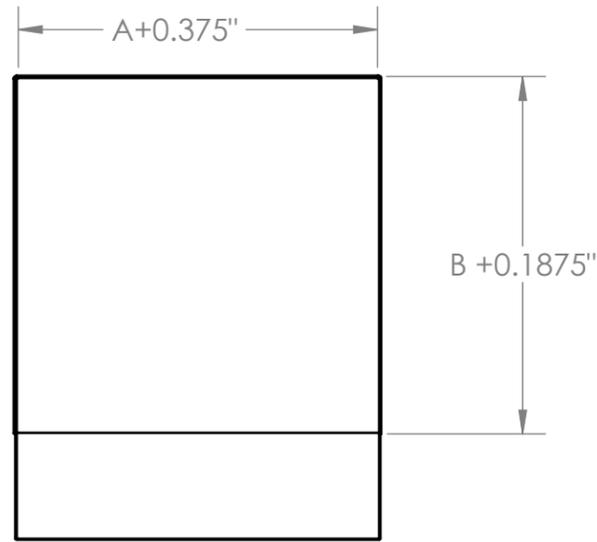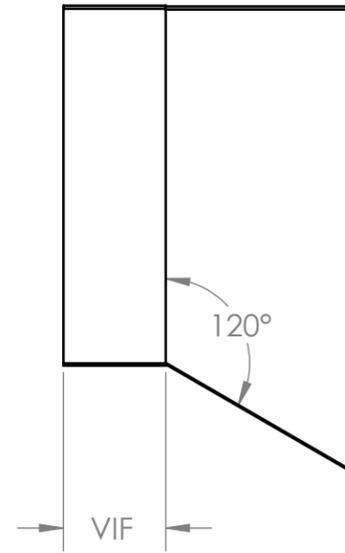


THROUGH WALL WITHOUT THROAT

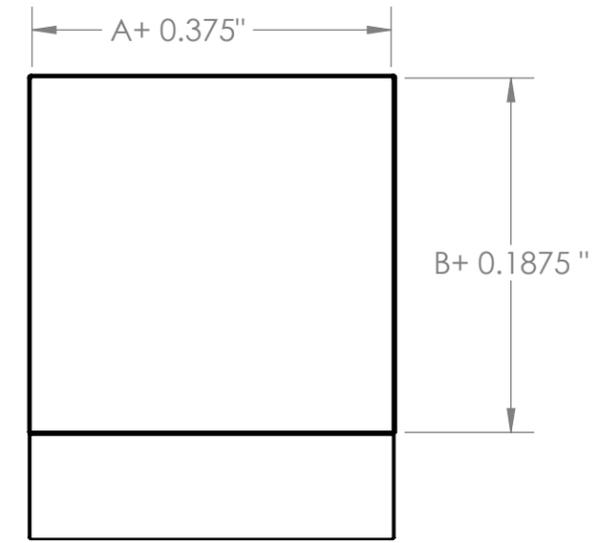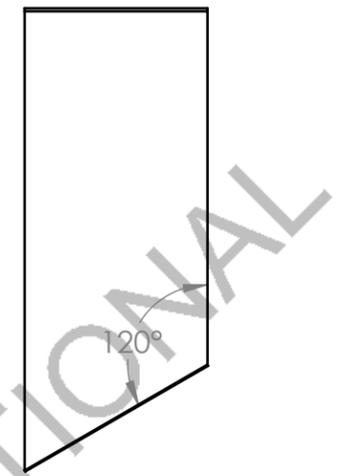

THROUGH WALL WITHOUT THROAT

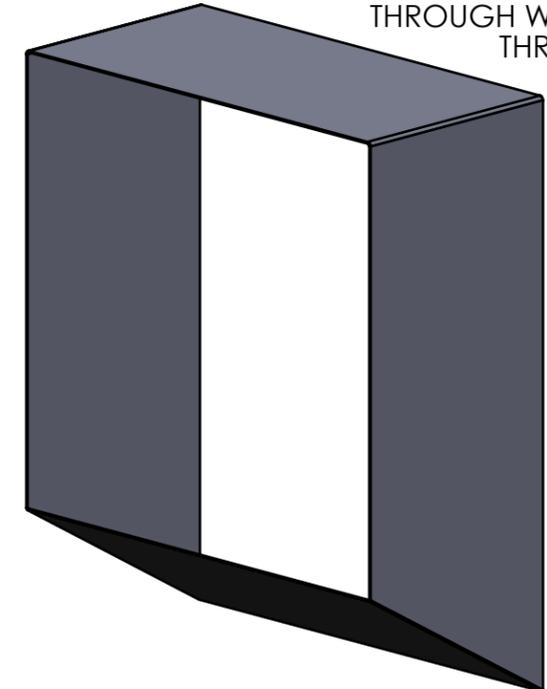

THROUGH WALL WITH THROAT

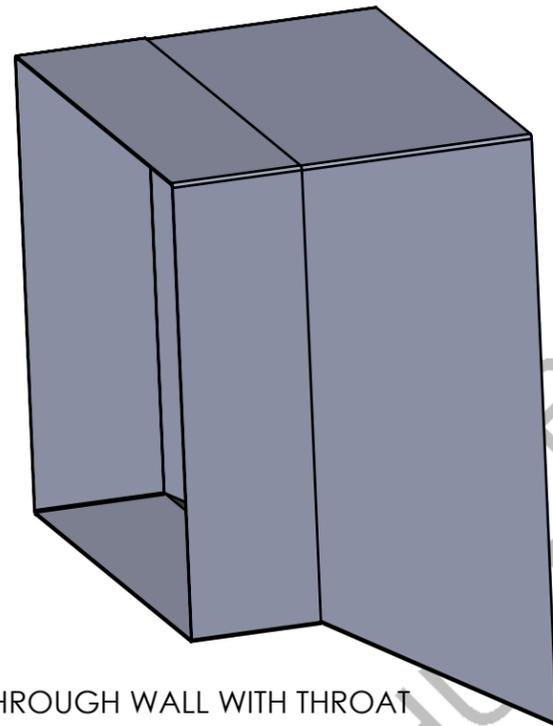

NOTE: Apart from the door fitment cross section (A & B) , other dimensions are subject to the field requirement.

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL ± 1/8 ANGULAR: MACH±1° BEND ±1° BEND-LINE PLACEMENT ±0.010 THREE PLACE DECIMAL ±0.125 WELD THICKNESS + 1/16 SHEET METAL SPECIFICATIONS Similar to chute material COMMENTS:		NAME	DATE	CHUTES PATENTED CHUTES INTERNATIONAL™ 33 Industrial Park Dr. Waldorf, MD 20602 Phone: (240) 448-5000 Fax: (301) 753-4108 WWW.CHUTES.COM
	DRAWN	KASSIE	07/12/22	
	CHECKED	ENG'G		
	MFG APPR.			
	PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF CHUTES INTERNATIONAL MANUFACTURING. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF CHUTES INTERNATIONAL MANUFACTURING IS PROHIBITED.			DESCRIPTION: THROUGH WALL TYPES
	SIZE B	PART ID: Through-Wall	REV A	DO NOT SCALE DRAWING SCALE: 1:8 SHEET 1 OF 1

4

3

2

1

B

B

A

A