



Top View

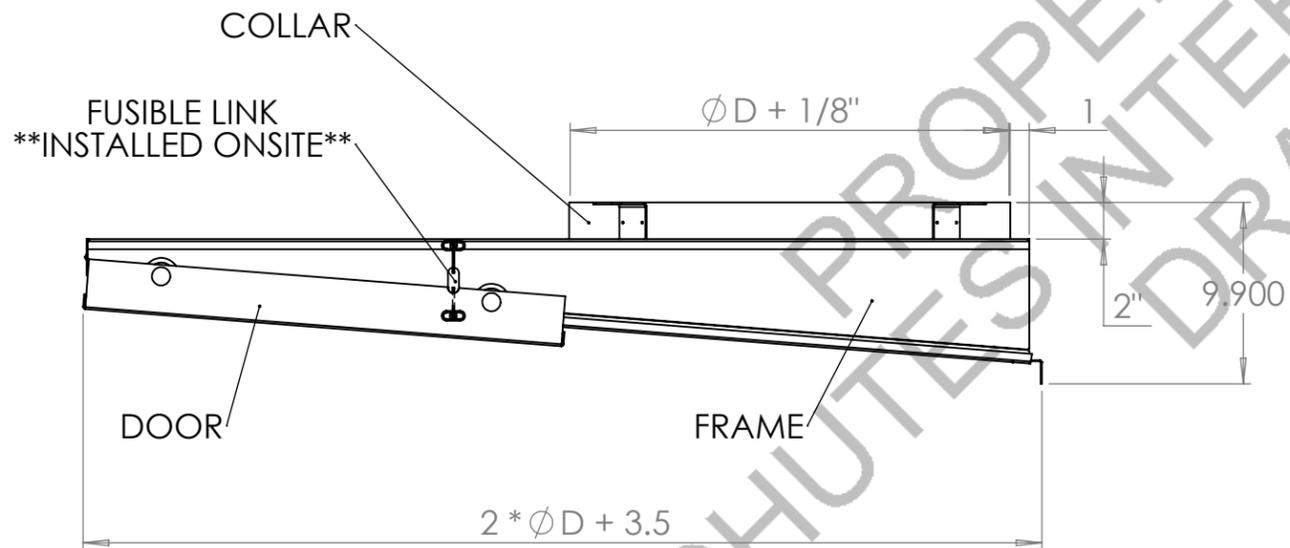

Front View

Notes:

- Door panel rolls own incline when fusible link melts at 165°F.
- This door is not designed to perform as a chute shut off.

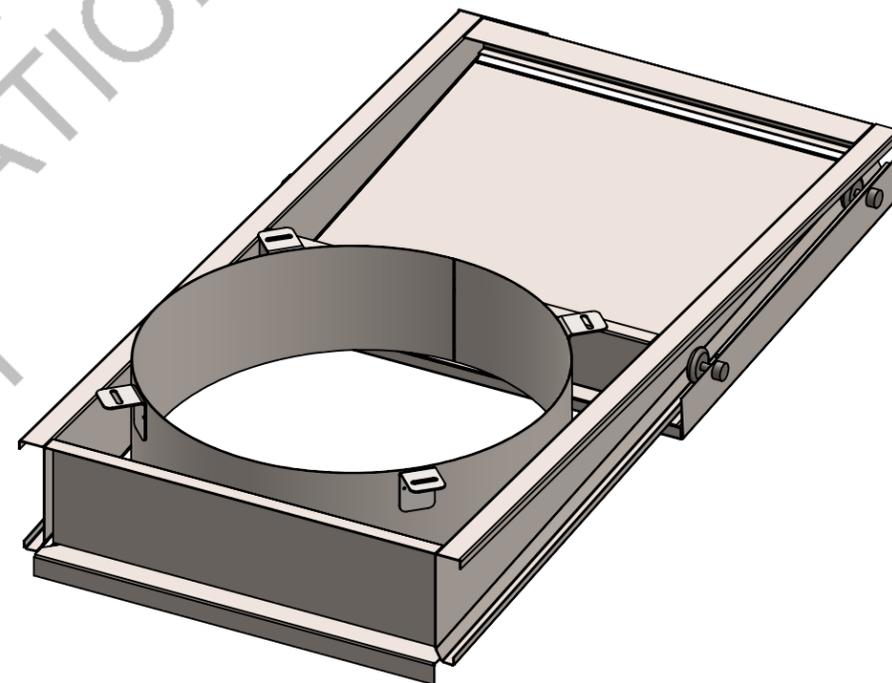

UNLESS OTHERWISE SPECIFIED:		NAME	DATE	CHUTES <small>PATENTED CHUTES INTERNATIONAL™</small> 33 Industrial Park Dr. Waldorf, MD 20602 Phone: (240) 448-5000 Fax: (301) 753-4108 WWW.CHUTES.COM
DIMENSIONS ARE IN INCHES	DRAWN	KASSIE	07/12/22	
TOLERANCES:	CHECKED			
FRACTIONAL $\pm 1/16$ ANGULAR: MACH $\pm 1^\circ$ BEND $\pm 1^\circ$ BEND-LINE PLACEMENT ± 0.010 THREE PLACE DECIMAL ± 0.100 WELD THICKNESS $+ 1/16$	MFG APPR.			
SHEET METAL SPECIFICATIONS	PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF CHUTES INTERNATIONAL MANUFACTURING. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF CHUTES INTERNATIONAL MANUFACTURING IS PROHIBITED.			DESCRIPTION: <h3>Typical Rolling Incline Discharge Door</h3>
COMMENTS:	SIZE	PART ID:	REV	
	B	RI Final	B	
	DO NOT SCALE DRAWING		SCALE: 1:10	SHEET 1 OF 1