

4


3

2

1

B

B

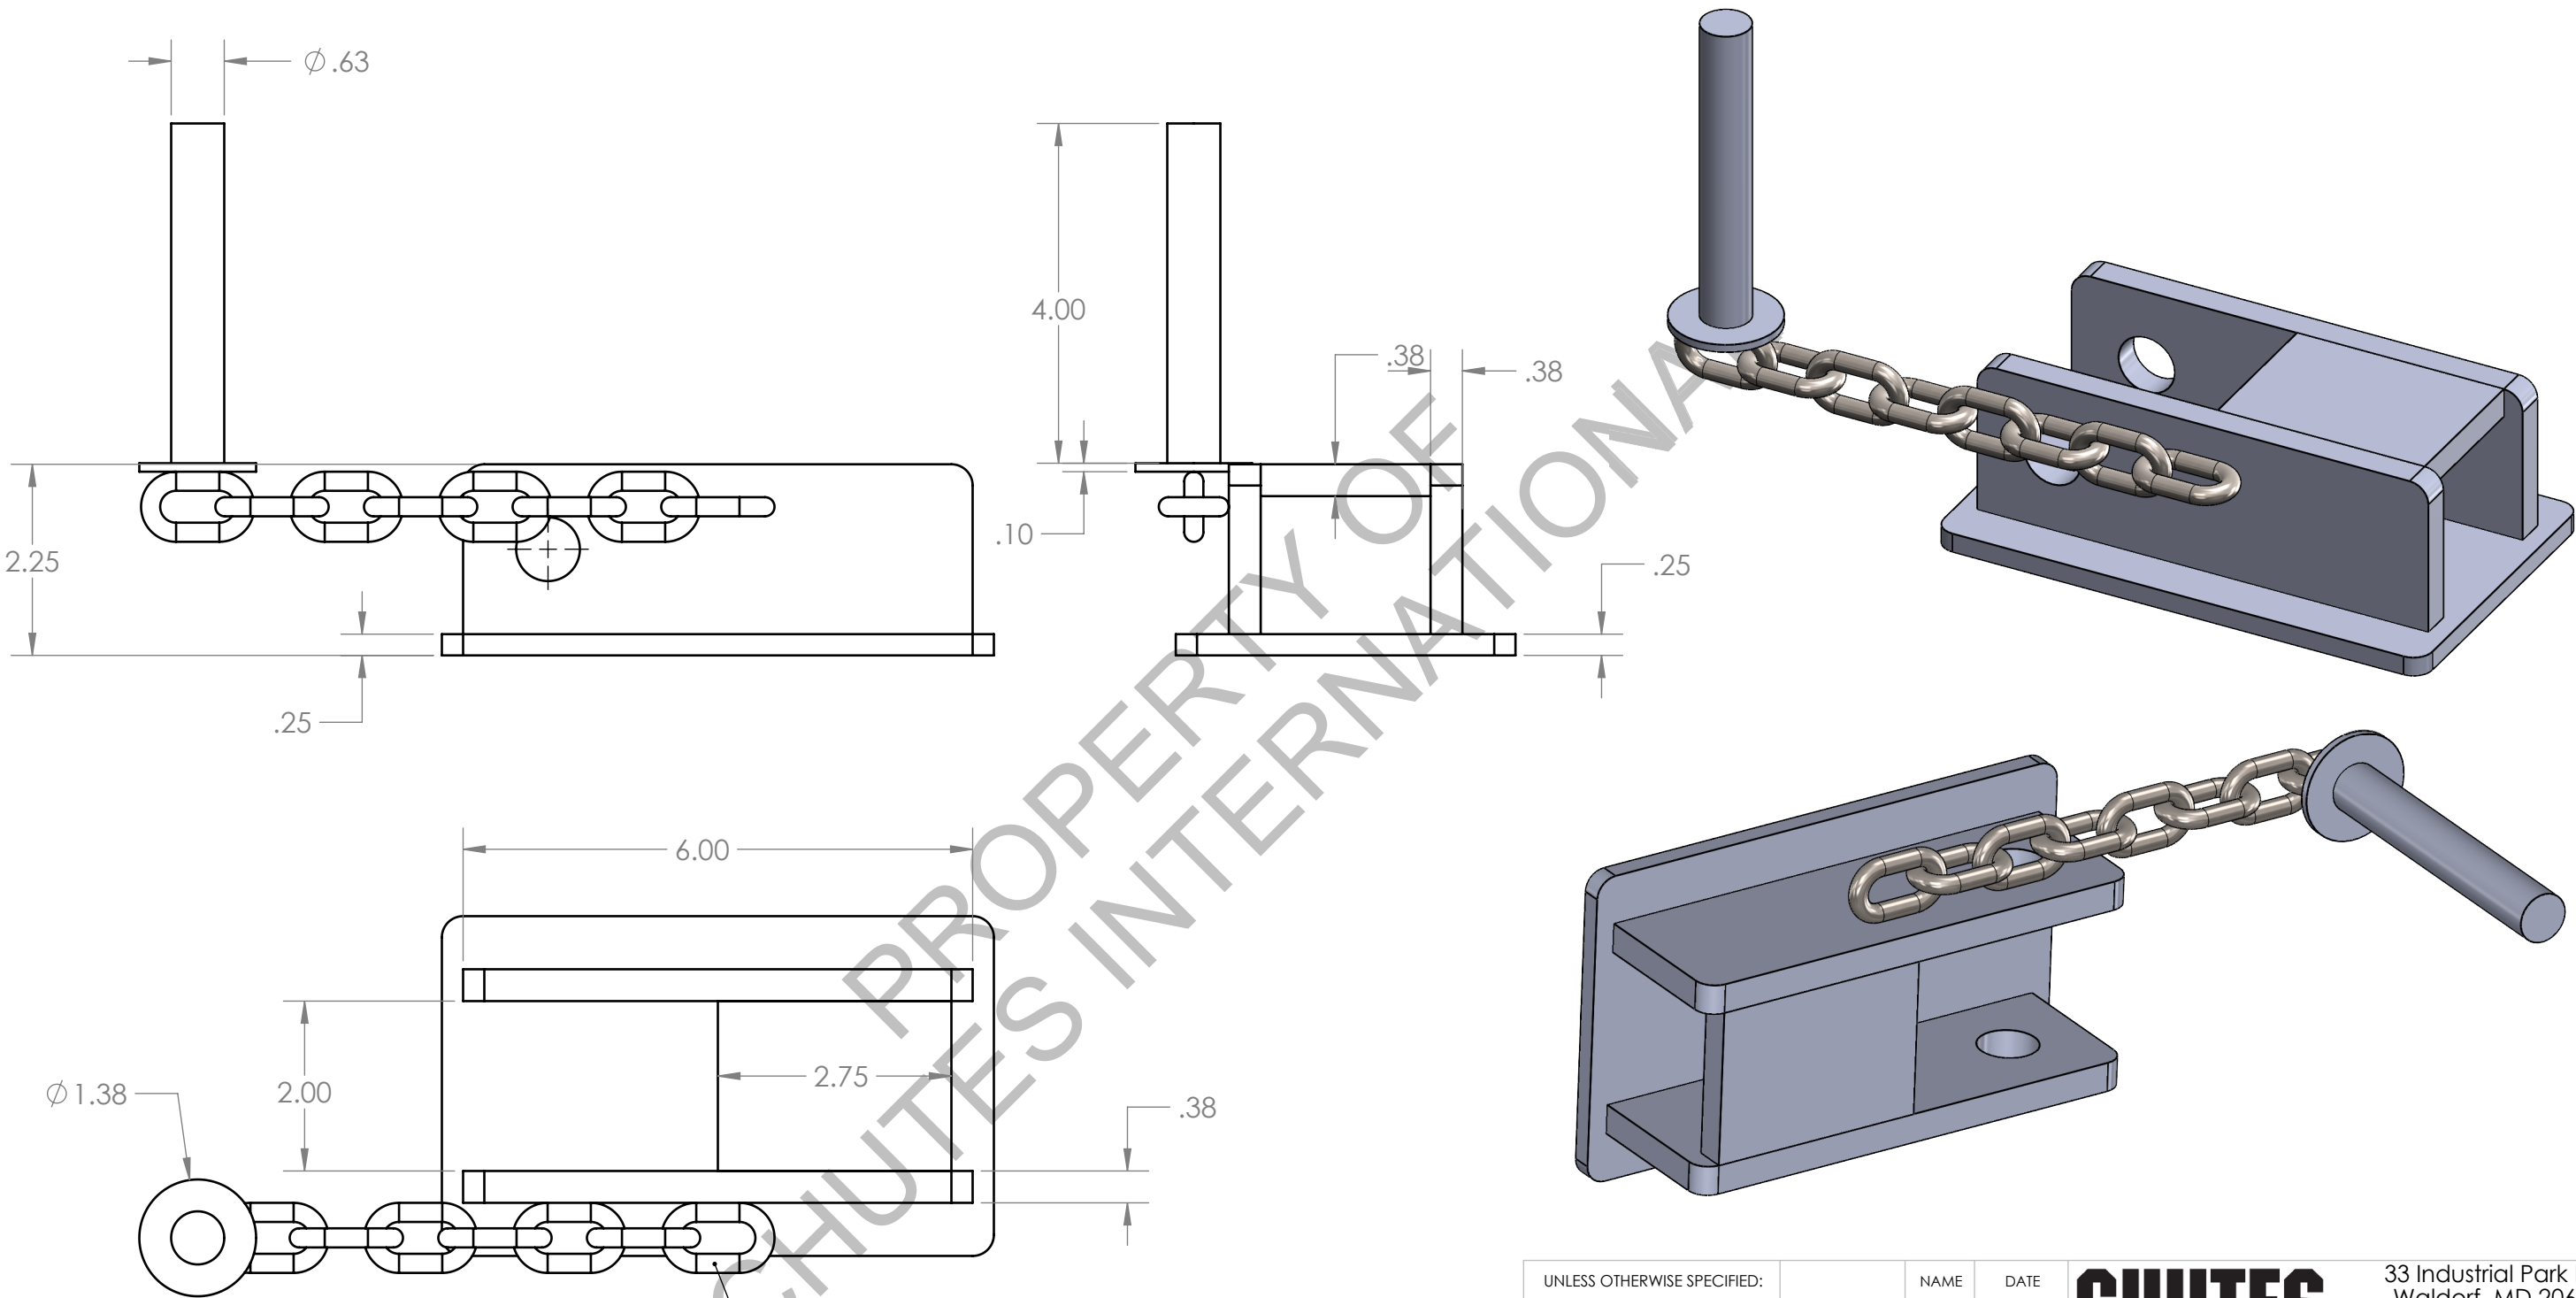

A

A

**NOTE** :CHAIN WILL BE WELDED  
ON OPPOSITE SIDE FOR LEFT SIDE  
DP600 CONNECTOR

UNLESS OTHERWISE SPECIFIED:		NAME	DATE	<div>CHUTES</div> <div>PATENTED CHUTES INTERNATIONAL™</div>	33 Industrial Park Dr. Waldorf, MD 20602 Phone: (240) 448-5000 Fax: (301) 753-4108 WWW.CHUTES.COM		
DIMENSIONS ARE IN INCHES		DRAWN	KASSIE		6/5/2025		
TOLERANCES:		CHECKED	ENG'G				
FRACTIONAL ± 1/16 ANGULAR: MACH±1° BEND ±1° BEND-LINE PLACMENT ±0.010 THREE PLACE DECIMAL ±0.100 WELD THICKNESS + 1/16		MFG APPR.	MFG'G				
SHEET METAL SPECIFICATIONS		PROPRIETARY AND CONFIDENTIAL			DESCRIPTION:		
COMMENTS:		THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF CHUTES INTERNATIONAL MANUFACTURING. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF CHUTES INTERNATIONAL MANUFACTURING IS PROHIBITED.			3YD Can to DP600 Connector Right side		
					SIZE	PART ID:	REV
					B	Connection Bracket	
					DO NOT SCALE DRAWING		SCALE: 1:2

4

3

2

1