

# DuraPak™

**"The Quiet Solution"**  
**DP130-HD**




DuraPak™130-HD Compactor delivers exceptional quality and power while running more quietly than similar models. Designed for high-rise applications, DuraPak™ machines are ideal choices for hotels, hospitals, apartment and office buildings. For use with compaction cans.

## Standard Features

- Remote Power Unit
- "UL" Listed Electrical Components
- 5 HP Motor 208/230 3PH
- Photo Electric Eye With Time Delay
- Automatic Cycle
- Mushroom Stop Button
- On/Off Key Switch
- Interlocked Side Access Door with Automatic Shut-Off
- Night Shut Down
- Programmable Logic Control (PLC)
- Ratchet Turnbuckle Hook-Up
- Soft Shift Single Solenoid Valve
- Replaceable Low Friction, Noise Reducing Wear Pads
- Hinged Steel Wiper Blade
- On Light
- Container Full Light
- Oil Pressure Gauge
- Excessive Run Timer

## Typical Compactor Room

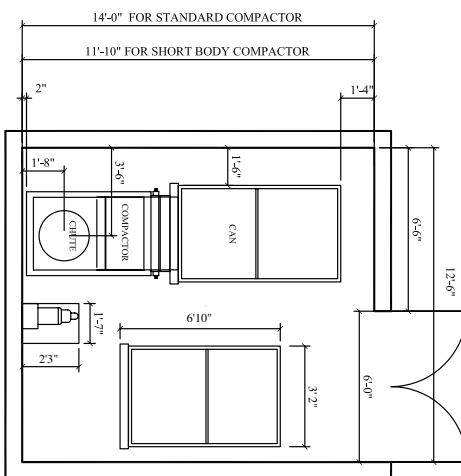

## Options

- 110 V Single Phase Motor
- 460/480V 3PH
- Access Door on Both Sides
- Rear or Front Loading Containers
- Odor Control System
- Hopper Sound Deadening Package
- Single Side Container Hook Up
- **Short Body DuraPak 130-HD**



## HYDRAULICS

Cylinder	4" x 2" DIA
Cylinder Stroke	32"
Pump	4 GPM
Valve	Single Solenoid Soft Shift
Oil Reservoir	14 GAL
Cycle Time	45 SEC
Normal Pressure	1600 PSI
Max. Pressure	2400 PSI
Normal Force	20,100 LBS
Max. Force	30,100 LBS

## RAM

Top Plates	1/4"
Sides	1/4"
Floor	3/8"
Face Plate	3/8"
Hinged Steel Wiper	4" x 1/4"
Replaceable Wear Pads	YES

## COMPACTOR FRAME

MFR's Rating	.25
Clear Top Opening	27" x 24"
Capacity Per Hour	20 cu. yds.
Floor (1/4" + 1/4" Wear Plate)	1/2"
Breaker Bar	4" x 3" x 1/2"
Side Plates	1/4"
Hopper Sides & Front	11 GA.
Hopper Impact Plate	1/4"
Ratchet Turnbuckle Cap.	38,000 lbs
Weight w/o Power Unit	1550 lbs
Compaction Chamber	27 1/4"Wx19 1/2"Hx22 1/2"L
Machine Dimensions	34"W x 68"H x 72"L

## ELECTRICAL

Motor (TEFC)*	5HP
"UL" Listed Elec. Components	YES
Power	208/230 3 Phase
NEMA Type Fuse	YES
Photo Electric Eye	YES
Amperage	208V/3PH @ 15.4

\*Totally Enclosed Fan Cooled

33 Industrial Park Drive, Waldorf, MD 20602 | 800.88-CHUTE | 240.448.5000 | FAX 301.753.4108 | www.durapak.org | email: info@chutes.com

**DuraPak™**  
**130-HD**

**Loaded With Extras**  
**At Standard Prices!**

**www.chutes.com | 1.800.882.4883**

Manufactured by CHUTES International Manufacturing (CIM). CIM offers a Continuous Improvement Program. It reserves the right to implement improvements to the items here-in without prior notice. © 2016 CIM/DuraPak.

[www.CutePDF.com](http://www.CutePDF.com)